

# EDGELESS Stereo Ceiling Speakers

## Product Release



ECS6D



ECS8D

Available with optional square grille (sold separately):  
SG-CS6 for the ECS6D  
SG-CS8 for the ECS8D

### Now Available in Stereo/Dual VC Models


Earthquake Sound's **EDGELESS** In-Ceiling Speakers are now also available in dual voice coil/stereo models with Dipole/Bipole and DVC/Surround selectable modes for use in limited/smaller space such as kitchens, hallways, bathrooms, etc.

The standard +/- 3dB adjustment switches combined with the Dipole/Bipole and DVC/Surround selectable modes further optimize the speakers' response to match the acoustics of the room and fulfill the end user's own personal preference.

Their advanced low mass stiff Kevlar cones and wide surrounds allow these Edgeless speakers to deliver deep, natural bass. Beside high efficiency, sonic accuracy is guaranteed by utilizing 1" (25mm) silk dome tweeters.

Designed with aesthetics (WAF-wife approval factor) and sound quality in mind, these speakers seamlessly blend into their surrounding as they provide a lifetime of durability and high-end performance.

Dipole/Bipole Switch



DVC/Surround Switch



± 3dB bass and treble controls



MODEL	MSRP	QTY
ECS6D	<b>\$269.00</b>	Piece
ECS8D	<b>\$299.00</b>	Piece

### Features

- Dual voice coil woofer with Kevlar cone bodies
- 1" (25mm) silk dome NEO swiveling tweeters
- Dipole / Bipole and DVC / Surround selectable modes
- Frameless design for reduced visibility/seamless blend
- ± 3dB bass and treble controls
- Turn-N-Lock™ installation mechanism for safe, time efficient and professional installation
- Gold plated, spring loaded terminals

### Specifications

	ECS6D	ECS8D
Frequency Response:	40Hz - 20kHz	30Hz - 20kHz
Sensitivity:	87dB @ 1W/1M	88dB @ 1W/1M
Nominal Impedance:	8-Ohm In Dipole Mode 4-Ohm In Bipole Mode	8-Ohm In Dipole Mode 4-Ohm In Bipole Mode
Power Handling:	350 Watts Max	450 Watts Max
Enclosure Type:	Impact resist ABS Plastic	
Driver Components:	Two-way system using one 6.5" Kevlar cone midbass and two 1" silk dome swiveling NEO tweeters	Two-way system using one 8" Kevlar cone midbass and two 1" silk dome swiveling NEO tweeters
Outer Diameter:	8 9/16" (223mm)	10 1/2" (267mm)
Cut Out Diameter:	7 7/8" (200mm)	9 1/2" (242mm)
Mounting Depth:	4 5/16" (110mm)	4 7/8" (124mm)
Grille:	White / Paintable, Magnetically Attached	

# EDGELESS SERIES

## 2-Way In-Ceiling Speakers

A seamless blend of high-end audio & interior design




### INTENDED USE

- ✓ Architects Custom Projects / High-End Designs
- ✓ Home Theater Systems, Kitchens, Hallways, Bedrooms & Bathrooms
- ✓ New Construction & Retrofit Applications

### SPECIAL FEATURES & HIGHLIGHTS

- Frameless design for reduced visibility/seamless blend
- Magnetically attached versatile, paintable round or square grilles (square grille are optional & sold separately)
- 1" (25mm) silk dome NEO swiveling tweeters
- Low mass stiff Kevlar cone bodies for a smooth, accurate & detailed output
- $\pm$  3dB bass and treble controls
- Dipole/Bipole and DVC/Surround selectable switches (available on the ECS6D & ECS8D only)
- Elaborate crossover networks with highest quality capacitors and inductors
- 12dB/Octave with polyswitch protection
- Easy Turn-N-Lock™ installation mechanism for safe, time efficient and professional installation
- Gold plated, spring loaded terminals

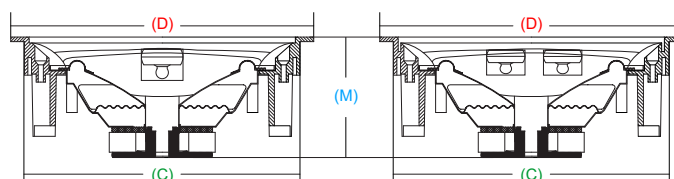

**ECS-6.5/ECS6D**

**ECS-8.0/ECS8D**

(D) Diameter	8-9/16" (217mm)	10-1/2" (267mm)
(C) Cut Out Hole	7-7/8" (200mm)	9-1/2" (240mm)
(M) Mounting Depth	4-5/16" (110mm)	4-7/8" (124mm)

### OBJECTIVE

The Edgeless In-Ceiling Speaker Series is designed with aesthetics (WAF-wife approval factor) and sound quality in mind. These speakers seamlessly blend into their surroundings as they provide a lifetime of durability and high-end performance.

Their advanced low mass stiff Kevlar cones and wide surrounds allow these Edgeless speakers to deliver deep, natural bass. Beside high efficiency, sonic accuracy is guaranteed by utilizing 1" (25mm) silk dome tweeters.

Each speaker is equipped with  $\pm$  3dB adjustment switches that optimize the response to match the acoustics of the room and to fulfill the end user's own personal preference.

The Edgeless Dual speakers feature Dipole/Bipole and DVC/Surround switches to allow the speakers to have customized performance based on their application.

### SPECIFICATIONS

	ECS-6.5	ECS6D	ECS-8.0	ECS8D
Max Power Handling	300 Watts	350 Watts	400 Watts	450 Watts
Frequency Response	40Hz - 20kHz		30Hz - 20kHz	
Woofer	6-1/2" with Kevlar cone body		8" with Kevlar cone body	
Tweeter	One 1" (25mm) silk dome NEO	Two 1" (25mm) silk dome NEO	One 1" (25mm) silk dome NEO	Two 1" (25mm) silk dome NEO
Impedance	8-Ohm	Dipole: 8-Ohm Bipole: 4-Ohm	8-Ohm	Dipole: 8-Ohm Bipole: 4-Ohm
MSRP	\$325.00/pair	\$269.00/piece	\$399.00/pair	\$299.00/piece

**Available with an optional square grille (sold separately):**  
SG-CS6 for the ECS6.5 & ECS6D (**MSRP** \$9.00/piece)  
SG-CS8 for the ECS8.0 & ECS8D (**MSRP** \$12.00/piece)